


MPK50 Main Features

BOOM ROTATION

- ✓ Innovative boom rotation system $+5^{\circ} / -5^{\circ}$

PATENTED

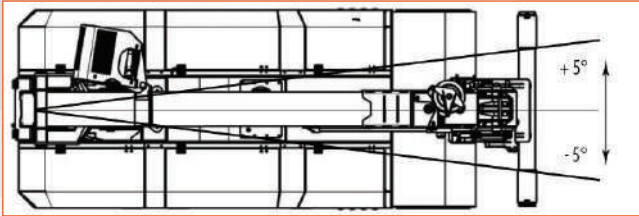

PROFESSIONAL RADIO REMOTE CONTROL

- ✓ Proportional
- ✓ Multifunctions (up to 3 movements)
- ✓ LCD display
- ✓ Crane and wheel control



FRONT STABILIZER

- ✓ To increase stability and lifting capacity



DIFFERENT ATTACHMENTS

TWO SECTIONS MODULAR JIB

TILTING HEAD



GLASS MANIPULATOR



CJEKKO
MPK50



Jekko srl
Via Campardone, 1 - 31014 Colle Umberto (TV) Italy
info@jekko.it - www.jekko-cranes.com

Product Catalog

MPK50

max 5 T

3050 x 1200 x 1750 mm

max 9.2 m


max 6.1 m

Pure innovation. Totally radio remote-controlled, battery powered, 5 T pick & carry, patented boom rotation system and frontal stabilizer bar make this crane one of a kind.




Technical Information

Dimension	 3050 x 1200 x 1750 mm
Crane & Options Weights	 Kg
	 MPK50 3450
	 / 1000
	 5T-D8 10
	 JIB1800-700.2M Module 1800 / 32 Kg Module 700 / 23 Kg Tot. 55 Kg
MPK50	 Battery 2 Batteries 24 V 620 Ah 12 kW 16,1 Hp
	 4.0 km/h
Gradeability	 20°

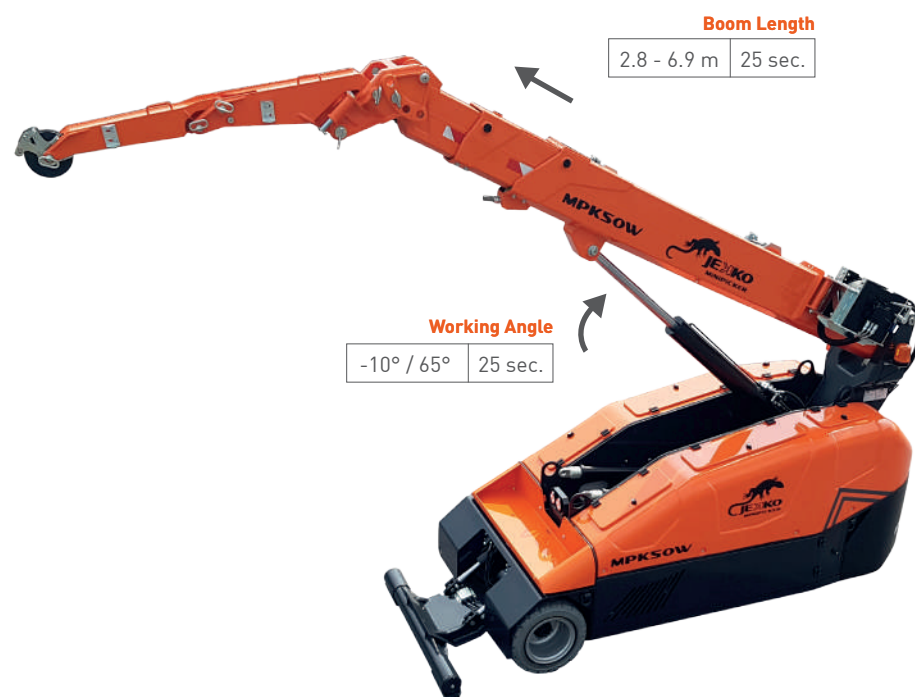

Winch&Fall Stages


 Main Winch	1000 kg 60 m - Ø 8 mm 45.1 m/min.
--	---






Max. Capacity	Line	Metres
 5000 kg	5	-11 m
 4000 kg	4	-13 m
 3000 kg	3	-18 m
 2000 kg	2	-27 m
 1000 kg	1	-53 m




Load Chart

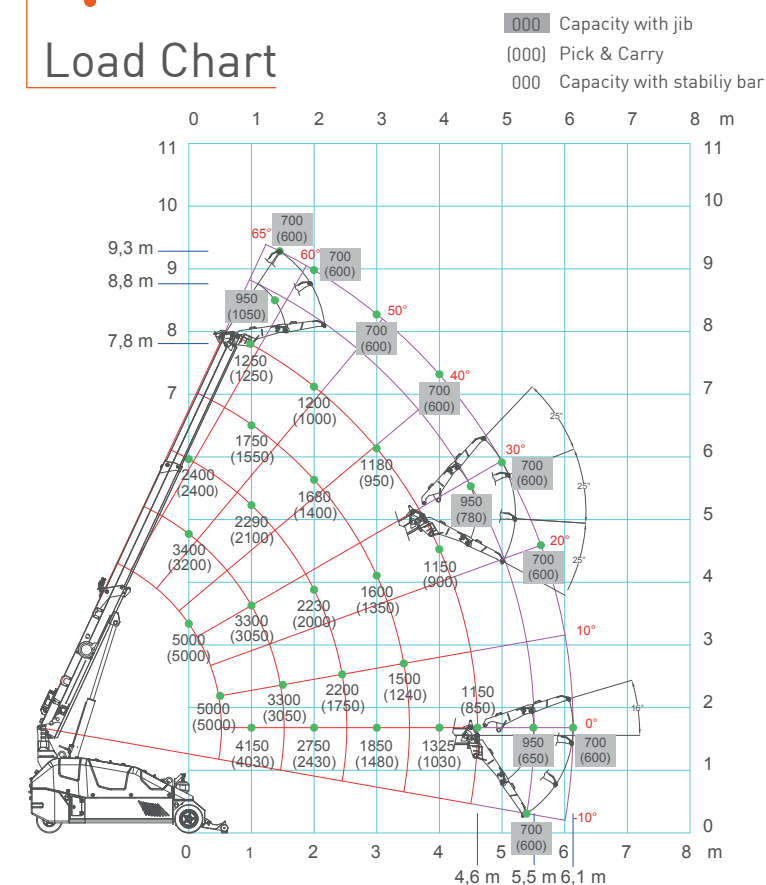

Dimensions

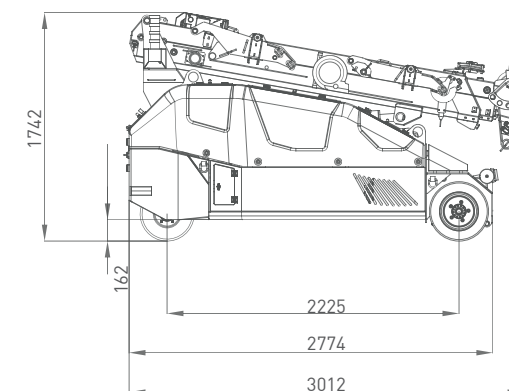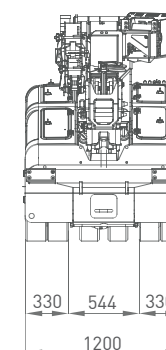

Crane Options

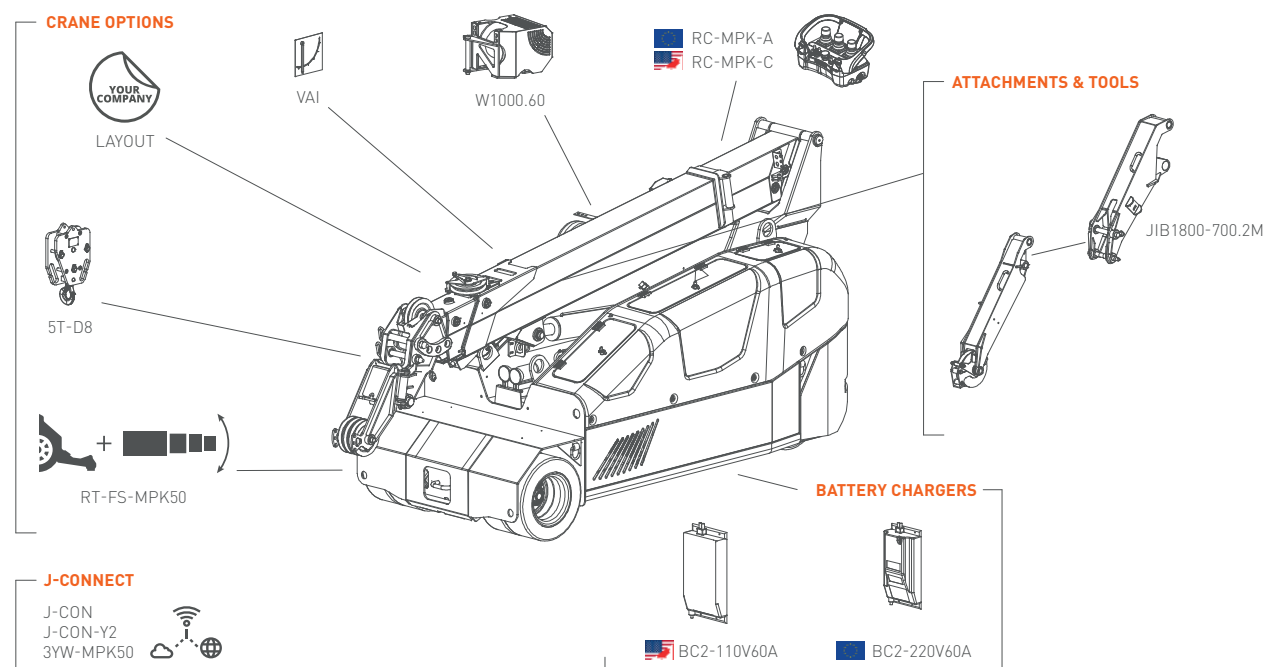

Tools Configurations

JIB1800-700.2M	Short	Long
	1800 kg	700 kg
	1000 kg @ 8.5 m	700 kg @ 9 m
	950 kg @ 5.5 m	700 kg @ 6 m

MV600.3E+	
	600 kg
	600 kg @ 8 m
	500 kg @ 6.5 m