

JF365

DIESEL BI-ENERGY



Lifting capacity
11500 kg



Max tip height
29,2 m



L x W x H

Dimensions (l x w x h)
5300 x 1800 x 2800 mm



Powered by
Bi-Energy

Diesel + Electric Power Pack



Weight
12300 kg



EN [m - kg]



FEATURES



3 BOOM ARTICULATIONS

- Higher boom versatility
- Pass-over obstacles
- Negative angle operation


VERSATILE STABILITY CONFIGURATIONS

- Stepless outriggers rotation 0°/45°
- Stepless telescopic outriggers extension
- Adjustable outriggers height
- Asymmetric configuration



ENDLESS CRANE CONFIGURATIONS

- Hook** - 11500 kg capacity
- Winch**
 - 2000kg-60 m
 - 1 / 2 / 3 falls
- Hydraulic jib** - 2500 kg capacity
 - Hook or winch mode
 - 9,8 m length fully extended
 - Hydraulic lines for tools
- Independent hydraulic tools** - Easy connection for any tool

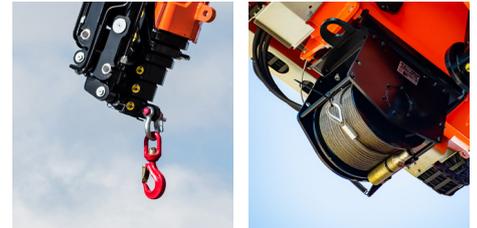

INTUITIVE USER INTERFACE

- Radio control**
 - Optimized usability
 - Improved layout
- On-board display**
 - Live stability area
 - Crane assistant onboard
 - Self-diagnostics & troubleshooting



DIESEL BI-ENERGY POWERED

- Diesel engine**
 - 55,4 kW Kubota diesel engine
 - DPF filter with automatic management
- Electric Power Pack ***
 - On board motor: 100% electric operation
 - Emission-free and noise-free indoor operation
 - Three-phase motors for every Country



MAN BASKET

- Up to 28 m height
- Single or two people
- Self-levelling, rotation and height adjustment
- Aluminium, steel or fiberglass
- EN280 certified



J-LINK POWERED BY TRACKUNIT*

- Remote fleet monitoring and diagnostics
- Built-in or retrofit on existing units






LOAD PLATFORM


- 3,5 tons capacity
- For easy material transport

EASY TRANSPORT

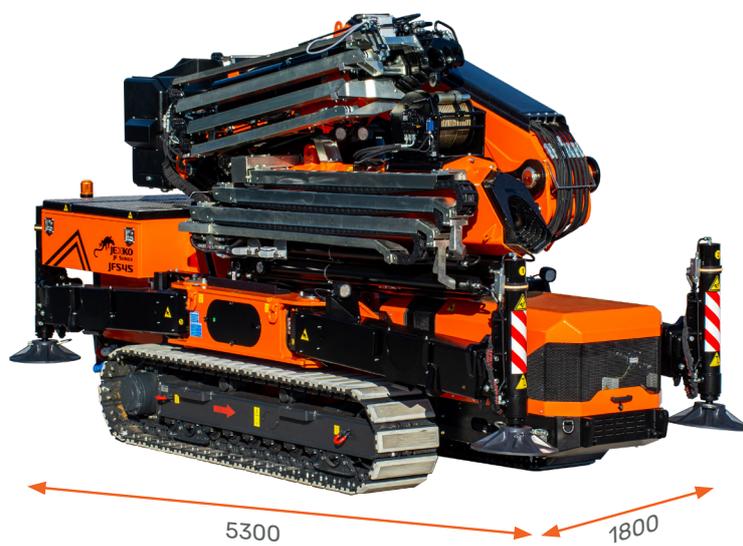


DIMENSIONS (mm)



STABILITY AREA (mm)

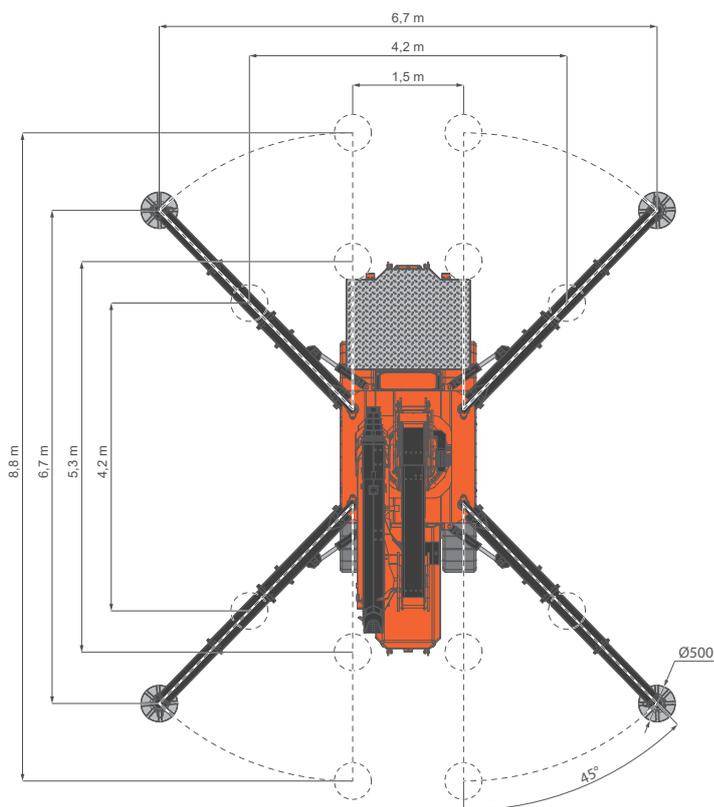

COMPACT FOOTPRINT

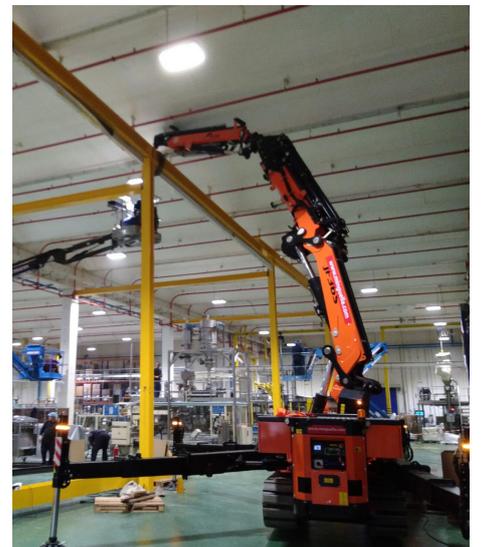

LOAD CHARTS

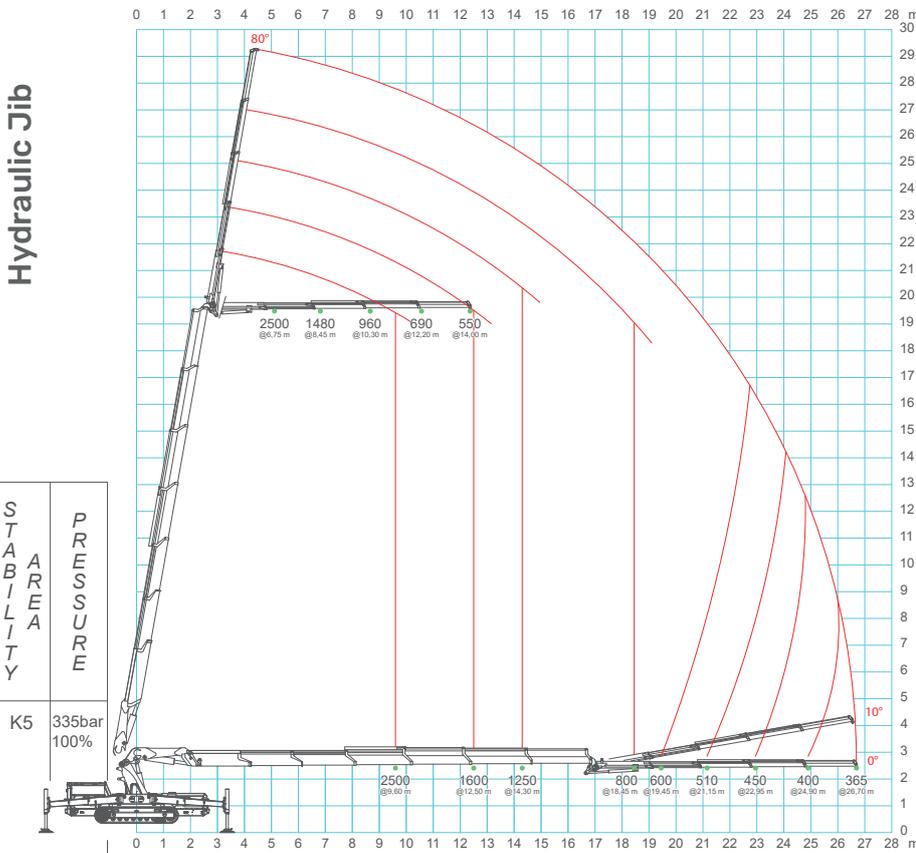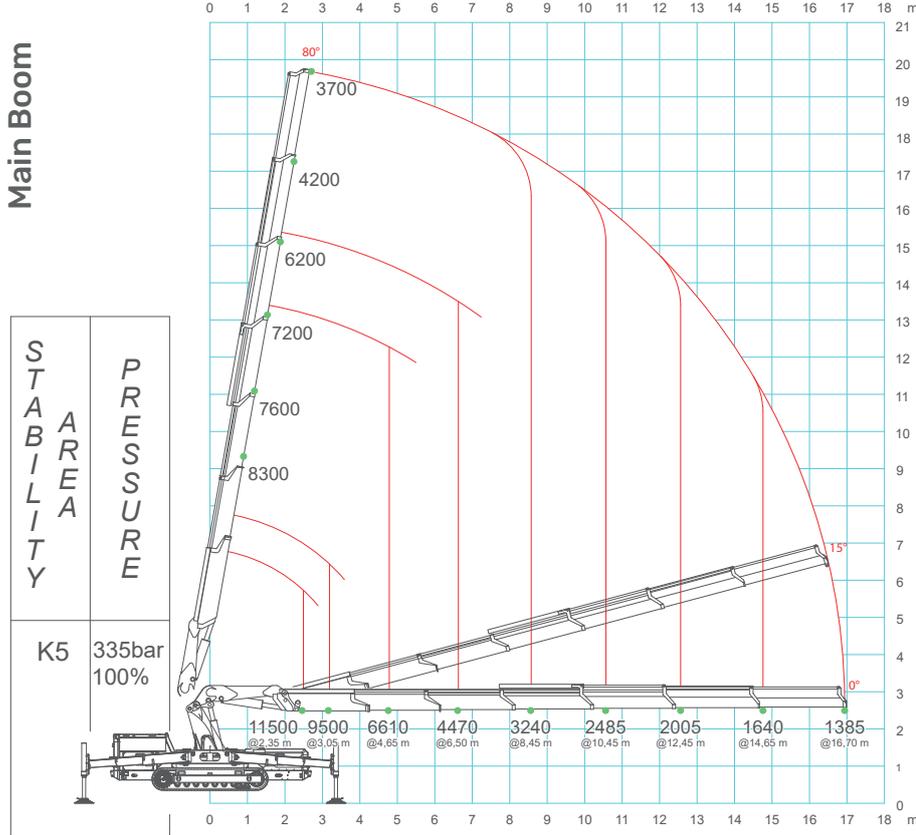

TOOLS AVAILABLE

HYDRAULIC JIB 2500 kg SWL



MAN BASKET 1 or 2 people



GLASS MANIPULATOR 800 kg SWL - JVM800R



SEARCHER HOOK 9500 kg SWL



MECHANICAL EXTENSIONS



JF365
DIESEL BI-ENERGY

Jekko s.r.l. • info@jekko.it • www.jekko-cranes.com

Specifications are subject to change without notice.

All data provided is for reference purposes only and is not legally binding.